



# Sunde Arctic<sup>®</sup> EPS

Sunde Arctic<sup>®</sup> EPS with 20% improved Lambda  
for demanding conditions



A business built on air  
[www.sundolitt.com](http://www.sundolitt.com)



**Headoffice**

**Brødr. Sunde as**


P.O.Box 8115, Spjelkavik  
 NO-6022 Ålesund  
 Telephone: +47 70 17 70 00  
 e-mail: norway@sundolitt.com



**Order: (+47 70 17 70 00)**

E-mail: ordre.norge@sundolitt.com

**Technical specifications Sunde Arctic® EPS**

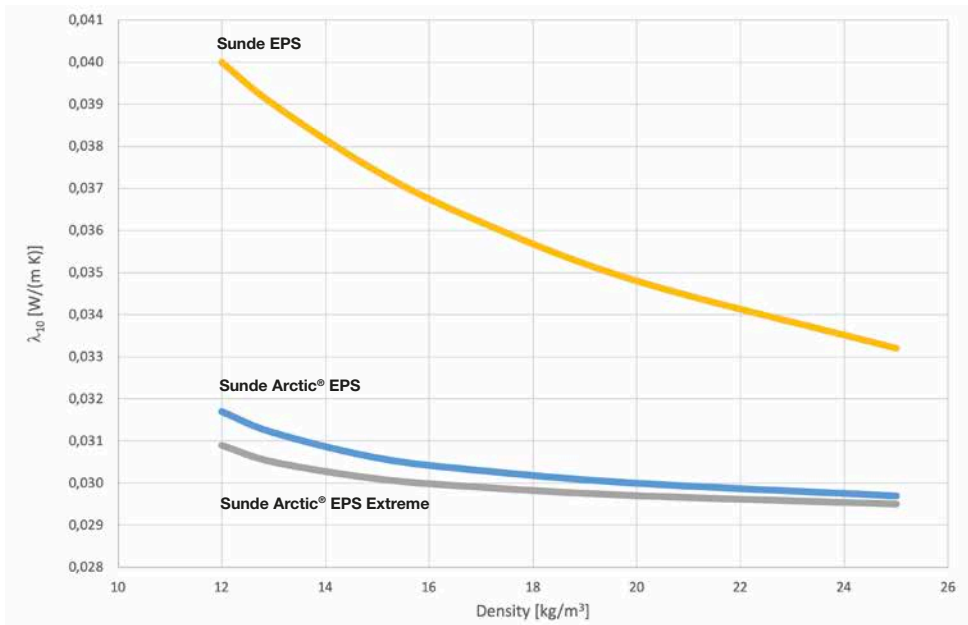

Product	Application	Bead size [mm]	Flame retardant	Density range* [kg/m³]
<b>Sunde Arctic 284</b>	Block moulding	1.0-1.6	no	12-20
<b>Sunde Arctic 284 SE</b>	Block moulding	1.0-1.6	yes	12-20
<b>Sunde Arctic 284 Extreme</b>	Block moulding	1.0-1.6	no	12-20
<b>Sunde Arctic 383</b>	Shape/block moulding	0.8-1.4	no	16-25
<b>Sunde Arctic 383 Extreme</b>	Shape/block moulding	0.8-1.4	no	16-25

\* double pre-expansion could be needed to reach the lowest densities



Sundolitt® are recyclable